

Mimaki®

Direct-To-Film Shaker TX-Y8018P

TA**Textiles
& Apparel**

Features of Tx-Y8018P Powder Shaker

All-In-One PLC Control Touch Panel

Easy operation and automatic production.

Integrated Internal Smoke Purifier

Stronger smoke purifying capability, compact design, and more environmentally friendly.

Intelligent Powder Spray System

Process greatly reduces the amount of time the powder needs to be recycled, resulting in decreased labor and increased efficiency.

Two Sided Heater

Heating system uses lamps on top and bottom to regulate temperature gradually. Bottom heater slows down ink drying by gradually increasing temperature, while top heater accelerates powder melting by gradually decreasing temperature to ensure even powder application and curing each time.

Intelligent Heater Control


Saves 30% power by automatically turning off heater when reaches desired temperature and prevents film overheating if machine pauses or stops operation.



Features	Other Brands	TX-Y8018 Model	Benefit
All in one PLC control touch panel	-	√	Easy operation and automatic production.
Integrated internal smoke purifier	-	√	More environmentally friendly and stronger smoke purifying capability.
Suction roller design	-	√	Ensure smooth film transportation.
Intelligent powder spray system	-	√	Reduce powder recycling times.
High frequency powder removal	-	√	Higher strength design with reduced sound. Reduces white powder transfer onto dark colored fabrics.
Two sided heater	Only top side	Two sided (Top and bottom)	Heating more efficient for even powder curing on film
Intelligent heating control	-	√	Save 30 % power and prevent film overheat
Auto take-up with tension bar system	-	√	Keeps constant tension for even and stable media take-up. Reduces manual operation.
Powder pre-heating system	-	√	Prevent powder from wet environment
Two side powder recycling	Only one side	Left and right side	Suitable for small space in case recycle box against the wall
Vacuum system	3 stage max	4 stage	Prevent material waste

What is DTF (Direct-To-Film)?

DTF or “Direct To Film”, is a printing method in which a design graphic is printed on a special film called DTF film, coated with a hot melt powder, then heat is applied to cure the powder. The resulting transfer sheet can then be heat pressed onto a fabric.

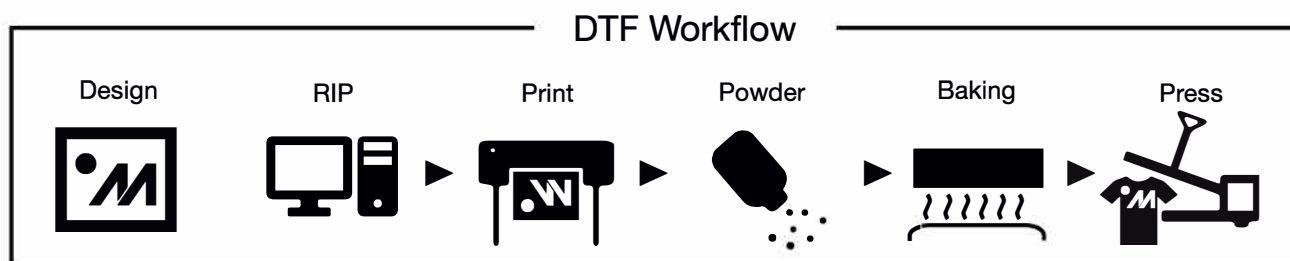

DTF Key Advantages

- No fabric pre-treatment necessary as with DTG
- Print colored natural & synthetic fabrics
- No masking or weeding compared to transfer vinyl
- Print designs with unlimited amount of colors
- Easy application process & durable product



TX-Y8018P

Maximum film width	32" in.
Pre-heat Temperature	0-100°C (0-212°F)
Heater Temperature	0-150°C (0-302°F)
Exhaust	350 m3 / per hour (6 m3/min.)
Power specification	Single-phase (220V AC ± 5%, 50/60 Hz)
Power consumption	Working Mode: 5000W (Energy Saving: 2KW in 1 hour)
Environment	Temperature: 18-30°C (65-86 °F), Humidity: 30-70% RH
Machine size	76" x 60" x 47" in. (LxWxH)
Machine weight	850 lbs.

Mimaki®
mimakiusa.com

Corporate Headquarters
150 Satellite Blvd. NE, Ste. A, Suwanee, GA30024
TEL: 888-636-0491, 855-897-2254

Mimaki USA Network

Rockaway, New Jersey
198 Green Pond Rd.
Rockaway, NJ 07866
TEL: 855-897-2254

Milwaukee, Wisconsin
4700 W. Ryan Road
Franklin, WI 53132
TEL: 414-367-2661

Irving, Texas
8080 Tristar Dr., Ste. 114
Irving, TX 75063
TEL: 888-530-3987

Los Angeles, California
150 W. Walnut St., Ste. 100
Gardena, CA 90248
TEL: 888-530-3987

Toronto, Canada
20 Barnes Ct., Bldg. G
Concord, ON L4K 4L4
TEL: 905-738-3913